



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
AUBURN

TYPE
LED

SERIES
BOLLARD

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model AUBURN
Type LED
Series BOLLARD



FIXTURE	SIZE	SOURCE	VOLTS	LAMP / TEMP	COLOR	LENS	OPTIONS
AUB-B (LED)	10 = x 42" x 8" sq. CH = Custom height, consult factory	10W 20W 30W 36W 40W	U = 120v-277v 8 = 480v	3K = 3000K = 90lm/w 35K = 3500K = 100lm/w 41K = 4100K = 110m/w 5K = 5000K = 120lm/w	DB = Dark Bronze BK = Black WH = White SL = Silver CC = Custom	CFA = Clear Frosted Acrylic WFA = White Frosted Acrylic	SP = Surge Protection D = 0-10V Dimming Driver MGF = Marine Grade Finish

SPECIFICATIONS

Housing

All parts are aluminum extruded square tube with .080 square aluminum roof cap with supports fabricated for maximum strength. ETL listed for wet locations.

LED

High efficiency, long-life surface mounted LED's mounted on MPCB aluminum boards. 100,000 hour lifespan based on IES LM-80 results and TM-21 calculations. 0-10V dimming driver for 120/277 volt, constant current, metal case, 5 year warranty.

Lens

Lens is fabricated from premium acrylic. Specify clear frosted or white frosted lens.

Mounting Options

Cast aluminum base plate secures to the housing. Mounting kit with anchor bolts, included.


Finish

Thermoset polyester oven-baked powder coat, in Dark Bronze. Custom colors are available to your specification. Marine Grade Finish available upon request.

Rating and Warranty

ETL Listed for US and Canada for wet locations. 5-year warranty


Dimensions



A	B	C	D
42"	10"	8" sq.	8" sq.

**Custom height available*

Mounting

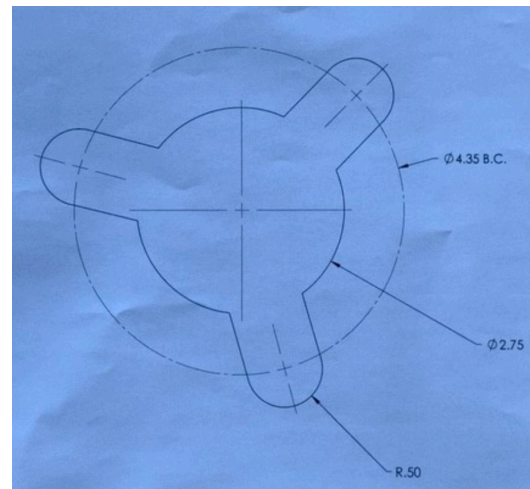

Bollard Base:

Rugged cast aluminum. Completely concealed.

Mouting:

Base mounts onto foundation with three (3) 3/8" x 12" galvanized anchor bolts on a 4.35 on center bolt circle. Bollard housing is secured to the base with stainless steel flat head, counter-sunk screws for a smooth, clean appearance.