



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
AURORA

TYPE
LED

SERIES
SITE & AREA

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model AURORA
Type LED
Series SITE & AREA



AUR-450
Slip Fitter mount



AUR-450
Trunnion mount

FIXTURE	WATTAGE	VOLTS	COLOR TEMP	OPTICS	COLOR	MOUNTING	OPTIONS
AUR	450W 600W 750W 900W <i>(efficacy = 135 lm/W)</i>	U = 120v-277v H = 347-480v	3K = 3000K 4K = 4000K 5K = 5000K 57K = 5700K	T1M = Type I Medium T2M = Type II Medium T3M = Type III Medium T3L = Type III Long T4S = Type IV Short T4M = Type IV Medium T5U = Average beam angle 10° T5V = Average beam angle 25° T5W = Average beam angle 40° T5S = Average beam angle 60° T5M = Average beam angle 90° T5L = Average beam angle 120° T5X = Average beam angle 150° T5D = Diffuser	BK = Black GR = Grey BZ = Bronze WH = White CC = Custom color	I = Slip Fitter (adjustable) TM = Trunnion Mount	M = Motion Sensor SP = Surge Protection PC = Photocell D = 1-10V Dimming BLS = Back Light Shield

SPECIFICATIONS

Housing

The housing is fabricated from die cast aluminum, featuring a modular design that allows for easy installation, replacement, and maintenance. Slim and low profile design minimizes wind load.

Listing & Ratings

UL/ cUL Listed, DLC, LM79, IK08 Rated, 1000-hour salt spray certification per ASTM B117/ ISO 9227:2012, RoHS

Finish

Corrosion resistant polyester powder painted. Standard colors come in black, grey, bronze, and white. Custom colors available upon request.

Mounting

Adjustable slip fitter arm mounts to a horizontal or vertical 2 3/8" (60mm) O.D. tenon. Tenon length must be a minimum of 4.72" (120mm). -60~+30 degree or -90~+0 degree of adjustment for leveling when horizontally mounted.

Also available with trunnion mount.

Electrical


- 450/600/750/900W
- 120-277VAC and 347-480VAC available.
- Surge protection to 20kV/10kA per ANSI/IEEE C62.41.2-2002 available

Warranty


5-Year warranty



Model	AUR-450	Net Weight	40.54lbs (18.39kg)
LED Modules	6	Gross Weight	46.91lbs (21.28kg)
LEDs	216	Product Dimensions	766x634.5x70mm 30.16"x24.98"x2.76"
EPA(sq.ft.)	0.67	Carton Dimensions	833x730x170mm 32.80"x28.74"x6.69"

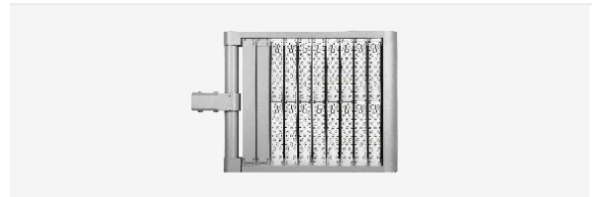

Model	AUR-600	Net Weight	48.50lbs (22.00kg)
LED Modules	8	Gross Weight	58.27lbs (26.43kg)
LEDs	288	Product Dimensions	885x634.5x70mm 34.84"x24.98"x2.76"
EPA(sq.ft.)	0.735	Carton Dimensions	953x730x170mm 37.52"x28.74"x6.69"

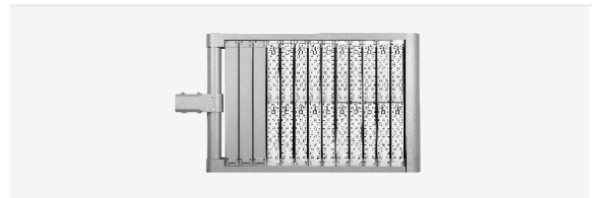

Model	AUR-750	Net Weight	60.32lbs (27.36kg)
LED Modules	10	Gross Weight	66.14lbs (30.00kg)
LEDs	360	Product Dimensions	1065x634.5x70mm 41.93"x24.98"x2.76"
EPA(sq.ft.)	0.843	Carton Dimensions	1133x730x170mm 44.61"x28.74"x6.69"



Model	AUR-900	Net Weight	65.92lbs (29.90kg)
LED Modules	12	Gross Weight	74.14lbs (33.63kg)
LEDs	432	Product Dimensions	1185x634.5x70mm 46.65"x24.98"x2.76"
EPA(sq.ft.)	0.919	Carton Dimensions	1253x730x170mm 49.33"x28.74"x6.69"