



**ZUMALIGHTING**  
QUALITY OUTDOOR SOLUTIONS



MODEL  
**FLEUR-W**

TYPE  
**LED WALL**

SERIES  
**WALL & CEILING**

**ZUMA LIGHTING LLC**  
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004  
[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

# ORDERING INFORMATION

**Model** FLEUR

**Type** LED WALL

**Series** WALL & CEILING

## ORDERING INFORMATION

MODEL			MOUNTING	OPTIC LENS	CCT (ANSI)	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
120-277VAC or 220-240VAC (30W/module)	120-277VAC or 220-240VAC (40W/module)	347-480VAC (40W/module)						
FLA30=30W	FLB40=40W	FLC80=80W	W = Wall Mount	T1	30K	BK	00 Not required	BS = Bird Spike SP = 10KA/20KA Surge Protection Device BL = Back Light Shield SC = Safety Cable
FLA60=60W	FLB80=80W	FLC120=120W		T2	40K	GR	01 Photocell	
FLA90=90W	FLB120=120W	FLC160=160W		T3	50K	BZ	04 DALI	
FLA120=120W	FLB160=160W			T4	57K	WH	05 1-10V dimming	
				T5				

**ZUMA LIGHTING LLC**

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004

[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)

## Housing

The fixture housing is fabricated from die cast aluminum components.

## Features & Benefits

- Modular design allows for easy installation, replacement, and maintenance.
- Available as pole mounted or wall mounted fixture.
- Multiple lighting control options are available

## Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

## Options

- Backlight Shield
- Button Style Photocell
- Motion Sensor
- Twist Lock Photocell

## Certificates & Warranty

- DLC and ETL Listed
- Suitable for wet locations
- 5-year warranty

## Electrical Components


Available in Types I through V. The FLA-W allows for 30w increments while achieving 120 lm/w efficacy. The FLB -W and FLC-W allow for 40w increments while achieving 160 lm/w efficacy.

## Technical Parameters

Power	30-320W
Input	120-277VAC or 220-240VAC or 347-480VAC
PF	>0.95
THD	<20%
L70	>200,000H
Operating Temperature	-40°C ~ +50°C
Efficacy	120-160lm/W
ANSI CCT	3000K/4000K/5000K/5700K
Min CRI	70* or 80 or 85
IP Rating	IP65
SPD	Optional
DALI	Optional
1-10V	Optional
Photocell	/
Smart Control	/
Optic (IESNA)	Type I, Type II, Type III, Type IV, Type V
Color Options	Black/Grey/Bronze/White

\* Standard

## Dimensions

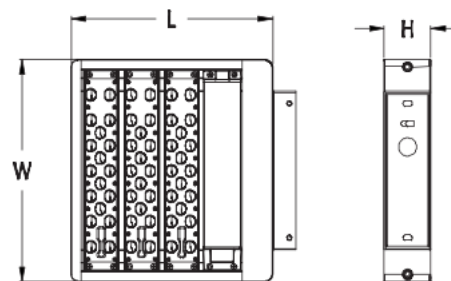

W = 13"  
L = 13.2"\*  
H = 2.75"

\*Fixture length (L) varies depending on model, wattage, and mounting style.

FLA90-W shown above. Contact factory for specific dimensions of each model.

## ZUMA LIGHTING LLC

325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004  
[INFO@ZUMALIGHTING.COM](mailto:INFO@ZUMALIGHTING.COM) • (310) 975-3126 • [ZUMALIGHTING.COM](http://ZUMALIGHTING.COM)