



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
PREMIER

TYPE
LED








SERIES
ARCHITECTURAL

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model PREMIER
Type LED
Series ARCHITECTURAL



FIXTURE	WATTAGE	VOLTS	COLOR TEMP	OPTICS	MOUNT	SHADE SIZE	COLOR	OPTIONS
PRM	15W	U = 120v-277v	27K = 2700K	T2	A =  B =  C =  D =  E =  F =  G =  (wall mount)	20 = 20" dia.	DB = Dark Bronze BK = Black WH = White SL = Silver CC = Custom	M = Motion Sensor PC = Photocell D = Dimming S = Surge Protection LS = 180° Cutoff Shield
	20W		8 = 480v	3K = 3000K		T3		
	30W	4K = 4000K		T4		28 = 28" dia.		
	35W	5K = 5000K		T5		30 = 30" dia.		
	40W	57K = 5700K						
	45W							
	50W							
	60W							
	80W							
	100W							
	120W							
	140W							
	160W							
	188W							
	230W							

SPECIFICATIONS

Housing and Lens

The fixture housing is fabricated from a combination of heavy duty cast and spun aluminum components. The frosted upper accent diffuser is fabricated from acrylic allowing for glow of light.

Electrical Components

High performance LEDs utilize state-of-the-art technologies for improved thermal performance. Available in Types II, III, IV, & V with wide choice of color temperatures ranging from CCT(2700K – 6500K). These LEDs are designed to fit LEDIL lenses with IP67 rating.

Mounting

Custom mounting arms available upon request. Contact factory for details.


Finish

Thermoset polyester oven-baked powder coat, in any standard color. Custom colors are available to your specification.

Certificates & Warranty

- Suitable for wet locations
- 5-year warranty

Dimensions

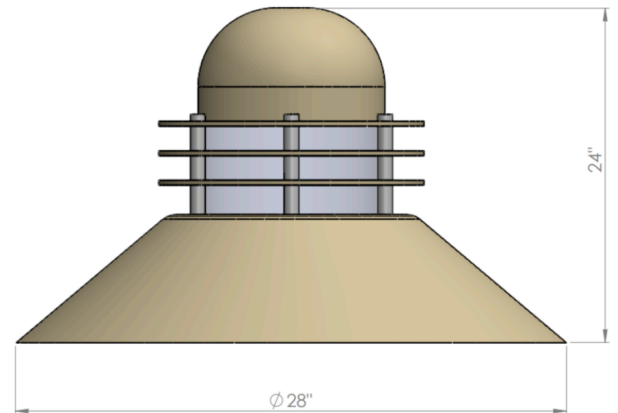

Shade size also available in 20", 24", and 30" dia.